

BANTA SAW ACCESS LTD

Chain Saw Sprockets Volume 2


How BANTA SAWS Sprockets are identified

SPUR SPROCKETS



Example part# 99-N304A7

- 99 - BANTA Prefix
- B - Bronze Bushing
- N - Needle Bearing
- 304 - Drum Size
- A - Pitch of chain
- 7 - Number of teeth

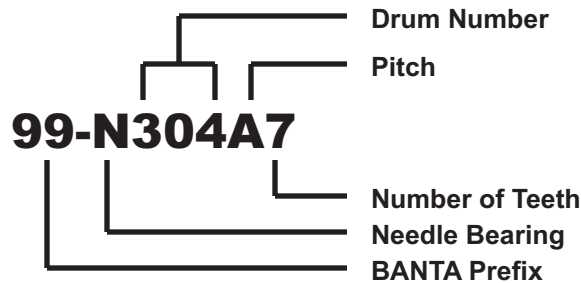


RIM SPROCKETS



Example part# 99-N19324

- 99 - BANTA Prefix
- B - Bronze Bushing
- N - Needle Bearing
- 193 - Drum Size
- 2 - Spline Number
- 4 - Rim Number

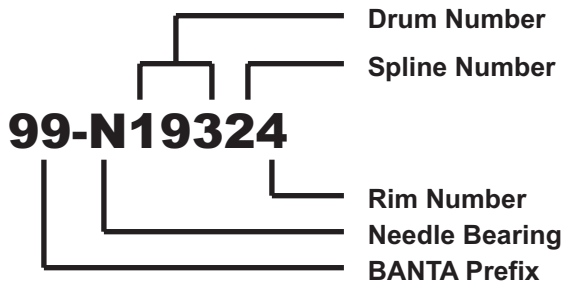

LEGEND

First Two Numbers "99" - Denotes BANTA Prefix
 Second Letter "N" - Denotes Bearing
 "B" - Denotes Bushing

Letter after drum number denotes pitch:

- "A" = 3/8" Pitch
- "B" = .404" Pitch
- "K" = 1/4" Pitch
- "L" = .325" Pitch
- "M" = 3/8" LP Pitch

Last number denotes number of teeth on sprocket

LEGEND

First Two Numbers "99" - Denotes BANTA Prefix
 Second Letter "N" - Denotes Bearing
 "B" - Denotes Bushing

Number after drum number denotes spline number:

- "1" = Standard 7 (.860" inside diameter)
- "2" = Small 7 (.740" inside diameter)
- "3" = Mini 7 (.660" inside diameter)

Last number denotes rim number

- "1" = 645-817
- "2" = 645-818
- "3" = 645-417
- "4" = 645-327
- "5" = 645-328
- "6" = 645-827
- "7" = 645-319



For all replacement "Rim Segments" see our "CHAIN SAW ACCESSORIES" section 14.



SPROCKET APPLICATION GUIDE

BANTA

Chainsaw Make & Model	Pitch	Teeth				Sprocket Drum ID	Crank shaft OD	 Sprocket Bearing No.
			Pro Spur Sprocket No.	Centre Drive Sprocket No.	Rim Segment No.			

DOLMAR (Sachs Dolmar)

33, 100, 102, 340, 341, 342, 344, 401, 410, PS34, PS400, PS411	3/8 LP	6	99-N362M6			2.720"		681-160
103, 105, 108	.325	8	99-N363L8			2.720"		
112, 113, 114, 116, 117, 119, 120, 120 Super	3/8	7	99-364A7	99-36411	645-817	2.940"	.5512"	
	3/8	8	99-364A8			2.940"	.5512"	
CA, 122, 122SL, 123, 133, 143, PS9010	3/8	8	99-360A8			2.720"	.590"	

ECHO

CS280, CS280E, CS290, CS300, CS328	3/8 LP	6	99-358M6			2.347"	.315"	681-163
CS302, CS315, CS330, CS351, CS360	3/8 LP	6	99-354M6			2.750"	.315"	681-163
CS3000, CS3400, CS3450, CS3500	3/8 LP	6	99-359M6			2.347"	.3937"	681-134
CS400, CS440, CS3600, CS3700, CS3900, CS4100, CS4200, CS4400, CS4500, CS4510,	.325	7	99-357L7			2.750"	.3937"	
CS4500, CS5500, CS4600, 4000, 4010 5000, 5200, CS4601	.325	7	99-N372L7			2.730"	.4724"	
CS451, CS451VL, CS452, CS500, CS510, CS550, CS600EVL, CS610, CS650, CS660, TWIN and FARMA.	3/8	7	99-355A7			3.045"	.3937"	
CS60, CS60S	3/8	7	99-353A7			2.737"	.5512"	
CS602, CS702, CS750	3/8	7	99-356A7			3.045"	.3937"	
	.404	7	99-356B7			3.045"	.3937"	
CS6700, CS6701	3/8	7	99-N371A7					
CS8000, CS8001	3/8	7	99-N370A7					

FRONTIER

MARK I, MARK II, MARK II VIP, F35, FB35	3/8 LP	6	99-N217M6			2.290"	.3937"	681-134
---	--------	---	-----------	--	--	--------	--------	---------

HOMELITE

110 ELECTRIC	3/8 LP	6	99-N217M6			2.290"	.3937"	681-134
	.325	7	99-N217L7			2.290"	.3937"	681-134
XL-MINI, SXL MINI AO, 190, 5240, 200, 192 XL 101, XL, XI2, 180, SUPER 2, VI SUPER 2. (3/8" shaft X 2-3/8" clutch)	1/4	9	99-N158K9			2.430"	.375"	681-158
	3/8 LP	6	99-N158M6			2.430"	.375"	681-158

Chainsaw Make & Model	Pitch	Teeth				Sprocket Drum ID	Crank shaft OD	
			Pro Spur Sprocket No.	Centre Drive Sprocket No.	Rim Segment No.			

HOMELITE continued

240, 245, XL-1, SUPER EZ, MINI EZ, SUPER EZ 200	3/8 LP	6	99-N152M6			2.700"	.375"	681-158
	.325	8	99-N152L8			2.700"	.375"	681-158
47, 54, 290, 340	.325	8	99-153L8			2.730"	12mm	
	3/8	7	99-153A7			2.730"	12mm	
XL MINI, SXL MINI AO (XL-76 / XL-130) (Bore without bearing: 11/16", Drum OD: 2-7/8")	3/8	7	99-N150A7			2.700"	.5625"	681-150
150AO, EZ-250AO, XL MINI, XL-101, VI-123, XL-76 (without brake), EZ, EZ AUTO, SEZ-AO, SXL MINI AO, 330, 350, 350SL, 360, 410 (Bore without bearing: 3/4", Drum OD: 2-7/8") 2-5/8" clutch & 5/8" shaft)	3/8	7	99-N157A7	99-N15711	645-817	2.700"	.625"	681-157
XL-76, XL-100, XL-102, XL-103, XL-104, XL-113, XL-114, XL-122, XL-123, VI-123, VI-125, 330, 350, 360, 410 (Bore without bearing: 11/16", Drum OD: 3-1/8") (3" clutch and 9/16" shaft)	3/8	7	99-N156A7			3.000"	.5625"	681-150
330, 350, 360, 410, 550 (3" clutch & 5/8" shaft)	3/8	7	99-N151A7			3.000"	.625"	681-157
XL-12 (before serial No. 1735838), XL-15, XL-400, XL-500, XL-600, XL-700, C-52.	3/8	7	99-N147A7	99-N14711	645-817	3.100"	.500"	681-147
XL-12 (after serial No. 1735838), Super XL, XL-AO, Super XL Auto, XL-15, XL-400, XL-500, XL-600, XL-800, XL-850, XL-870, XL-875, XL-901, XL-903, XL-913, XL-914, XL-922, XL-925, VI-944, VI-955 and Super XL-925. (6 shoe clutch)	3/8	7	99-N148A7	99-N14811	645-817	3.100"	.6250"	681-157
	.404	7	99-N148B7			3.100"	.6250"	681-157
350, 350P, 350SL, 350PSL (1/2" shaft and 2-5/8" clutch)	3/8	7	99-N149A7			2.700"	.500"	681-147
XP2000, XP1020 Super, 2000E, 2000 Auto, 2100 Auto, Super 2100 Auto, 650, 750	3/8	7	99-N134A8			3.100"		
EZ, EZ-6, 7-19, 7-19C, 600D, 700D, 707D, 755D, 770D, 775D, ZIP, Super ZIP, C5, C51, C7, C71, C72, C9, C91, XP1000, XP1020, SXP1020, XP1100, 2150 and 600.	.404	7	99-N135B7			3.100"	.5625"	

HUSQVARNA

HUSKY JR 121	3/8 LP	6	99-B225M6			2.700"	.4375"	
33, 34, 35, 37, 38	3/8 LP	6	99-N217M6			2.290"	.3937"	681-134
36, 41, 136, 141	3/8 LP	6	99-266M6 99-N266M6			2.500" 2.500"	.3937" .3937"	681-160 681-160
	.325	7	99-N266L7	99-26624	645-327	2.500"	.3937"	681-160

Chainsaw Make & Model	Pitch	Teeth				Sprocket Drum ID	Crank shaft OD	 Sprocket Bearing No.
			Pro Spur Sprocket No.	Centre Drive Sprocket No.	Rim Segment No.			

HUSQVARNA continued

246, 335	3/8 LP	6	99-N108M6			2.500"	.3937"	681-160
44, 140, 240, 340, 444, PRACTICA 40, 40P, 240P, RANCHER 40	.325	7 8	99-N303L7 99-N303L8	99-N30324	645-327	2.492" 2.492"	.4375" .4375"	
40, 45	.325	7	99-N265L7	99-N26524	645-327	2.492"	.5000"	681-163
50, 51, 55, 154, 254, 257, 262	.325	7	99-N110L7	99-N11024	645-327	2.700"	.5000"	681-163
254 (after No. 345-0001), 257 (after No. 314-0001), 262 (after No. 345-0001).	.325	7		99-26724	645-327	2.700"	.5000"	681-163
	3/8	7		99-26726	645-827	2.700"	.5000"	681-163
340, 345, 346XP, 350, 351	.325	7	99-N271L7	99-N27124	645-327		.5000"	681-163
42, 133, 234, 238, 242 (before No. 3441001)	.325	7		99-N26824	645-327	2.480"	.4375"	
65, 77, 160, 163, 180, 260, 263, 280, 380, 480	3/8	8	99-N301A8			3.100"	.5000"	
	.404	7	99-N301B7			3.100"	.5000"	
181, 185, 281, 285, 288, 298, 394, 395, 395XP, 1100, 2100, 2101	3/8	8		99-N30212	645-818	3.100"	.5625"	
	.404	7		99-N30213	645-417	3.100"	.5625"	
61, 66, 162, 266, 268, 272, Rancher 61	3/8	7	99-N304A7	99-N30411	645-817	3.100"	.5000"	
357, 359, 359EP, 355	3/8	7		99-N30511	645-817	2.700"	.5000"	681-163
362, 365, 371, 372	3/8	7	99-N273A7			3.091"	.4724"	

JOBU

SL-2, SL-21	3/8 LP	6	99-N217M6			2.290"	.3937"	681-134
SL-3, SL-35	3/8 LP	6	99-B224M6			2.492"	.4062"	
	1/4	8	99-B224K8			2.492"	.4062"	

JOHN DEERE

8, 9, 61, 81, 91	3/8 LP	6	99-N238M6			2.240"		
25EV	3/8 LP	6	99-358M6			2.330"	.315"	
28, 30, 35, 40 and 40V	3/8 LP	6	99-354M6			2.750"	.315"	
12, 15	1/4	9	99-N237K9			2.720"		
	3/8	7	99-N237A7			2.720"		
17, 19	3/8	7	99-N147A7	99-N14711	645-817	3.100"	.5000"	681-147

SPROCKET APPLICATION GUIDE

BANTA

Chainsaw Make & Model	Pitch	Teeth				Sprocket Drum ID	Crank shaft OD	
			Pro Spur Sprocket No.	Centre Drive Sprocket No.	Rim Segment No.			

JOHN DEERE continued

45, 46, 450	.325	7	99-357L7			2.750"	.3937"	
56, 62	.325	7		99-26724	645-327	2.700"	.5000"	
50V, 55V, 65E	3/8	7	99-355A7			3.045"	.3937"	
60V, 70V, 80V	3/8	7	99-356A7			3.045"	.3937"	
	.404	7	99-356B7			3.045"	.3937"	

JONSEREDS

LIL' JON, LIL' JON AUTO	3/8 LP	6	99-B225M6			2.700"	.4375"	
PRO 35	3/8 LP	6	99-264M6			2.290"	.3150"	
36, 361, 365, 370, 380	3/8 LP	6	99-N217M6			2.290"	.3937"	681-134
2033	3/8 LP	6	99-N108M6			2.500"	.3937"	681-160
2035, 2036, 2040, 2041	3/8 LP	6	99-266M6 99-N266M6			2.500" 2.500"	.3937" .3937"	681-160 681-160
	.325	7	99-N266L7	99-N26624	645-327	2.500"	.3937"	681-160
450, 455, 510, 520, 525, 535, 540, 2044, 2051, 2054, 2055	.325	7		99-N21824	645-327	2.480"	.4724"	681-161
	.325	8	99-N218L8			2.480"	.4724"	681-161
45, 49, 50, 51, 52, 451, 452, 521	.325	8	99-N260L8			2.930"	.5000"	681-163
490, 590	.325	7	99-N110L7	99-N11024	645-327	2.700"	.5000"	681-163
2045, 2050, 2063, 2145, 2149, 2150	.325	7	99-N265L7	99-N26524	645-327	2.492"	.5000"	681-163
60, 61, 62, 66, 70, 601, 621	3/8	8	99-N261A8			2.940"	.5000"	
	.404	7	99-N261B7			2.940"	.5000"	
75, 80, 81, 90, 751, 801, 910, RACKET	3/8	8	99-N262A8			2.940"	.5512"	
	.404	7	99-N262B7			2.940"	.5512"	
625, 630, 630 SUPER, 630 Westcoast & 670	3/8	7	99-N304A7	99-N30411	645-817	3.100"	.5000"	
820, 830, 910, 920, 930	3/8	7	99-263A7			3.090"	.5512"	681-157
	3/8	8	99-263A8			3.090"	.5512"	681-157
1020	3/8	7	99-N197A7			2.900"	.5512"	
2077, 2083	3/8	7	99-269A7	(Sprocket Drum not notched)		3.08"	.4724"	
	3/8	7	99-N277A7	(Sprocket Drum notched - 2 sides)		3.08"	.4724"	

SPROCKET APPLICATION GUIDE

BANTA

Chainsaw Make & Model	Pitch	Teeth				Sprocket Drum ID	Crank shaft OD	Sprocket Bearing No.
			Pro Spur Sprocket No.	Centre Drive Sprocket No.	Rim Segment No.			

JONSEREDS continued

2063*, 2071*, 2065, * NEEDS SPACER	3/8	7	99-N273A7			3.091"	.4724"	
2094	3/8	7		99-N27411	645-817		.5625"	
2095 TURBO	3/8	7	99-N272A7				.5625"	

LOMBARD

PONY	3/8 LP	6	99-N217M6			2.290"	.3937"	681-134
AL42, AL51, COMANGO, GLP-500 SUPER LIGHTNING I, II, III, IV, V	3/8	7	99-N156A7			3.000"	.5625"	681-150

MAKITA (also see Dolmar)

DCS 6000, DCS 6800	3/8	7	99-364A7	99-36411	645-817	2.940"	.5512"	
	3/8	8	99-364A8			2.940"	.5512"	

McCULLOCH

MINI-MAC, MINI-MAC 6, 25, 30, 35, MAC 6, 110-140, 3214, 3216, 3516, 3818, POWERMAC 310-340, 365, 480, PROMAC 3205, 3805, 2000-2016, 2316, 2318, 3000, 3210-3216, SUPER PRO 40, TITAN 7, TITAN 35, TITAN 40, EAGER BEAVER	1/4	8	99-N174K8			2.735"	.3937"	681-160
	3/8 LP	6	99-N174M6			2.735"	.3937"	681-160
PM36, PM40	.325	7	99-N174J7	(Drilled hole in spur for oiler)		2.735"	.3937"	681-160
PM350, PM3500, PM4000	.325	7	99-N174L7			2.735"	.3937"	681-160
PM5000	.325	7	99-N271L7	99-N27124	645-327		.5000"	681-163
PM6800	3/8	8	99-360A8			2.720"	.5900"	
PRO MAC 55, 60, 155, 165, 355, 375, 515, 610, 650, 655, 700, 805, 850, SP-60, CP-70, SP-70, MAC 1-10 thru 10-10.	3/8	7	99-N176A7	99-N17611	645-817	3.350"	.5000"	681-163

MONTGOMERY WARD

24000A, 24002A	3/8 LP	6	99-N238M6			2.240"		
24062, 24064, 26066, 24068	1/4	8	99-N174K8			2.735"	.3937"	681-160
	3/8 LP	6	99-N174M6			2.735"	.3937"	681-160
24032, 24033, 24035, 24072, 24075	1/4	9	99-N237K9			2.720"		
	3/8	7	99-N237A7			2.720"		

SPROCKET APPLICATION GUIDE

BANTA

Chainsaw Make & Model	Pitch	Teeth				Sprocket Drum ID	Crank shaft OD	 Sprocket Bearing No.
			Pro Spur Sprocket No.	Centre Drive Sprocket No.	Rim Segment No.			

MONTGOMERY WARD continued

24031, 24036, 24037, 24038, 24040, 24045, 24085, 24089, 24090, 24094, 24095, 24096	3/8	7	99-N147A7	99-N14711	645-817	3.100"	.5000"	681-147
24084, 24086	3/8	7	99-N176A7	99-N17611	645-817	3.350"	.5000"	681-163

OLEO-MAC / OLYMPYK

233, 234, 240, 241, 244, 335, 340	3/8 LP	6	99-N046M6			2.300"		
	.325	7	99-N046L7			2.300"		
935, HANDY 30-35	3/8 LP	6	99-264M6			2.290"	.3150"	
931, 932	3/8 LP	6	99-451M6			2.670"		
250, 251, 252, 254, STANDARD 264, 350, 355	3/8	7	99-045A7			2.700"	.4724"	
260, 261, 271, 272, 280, 281, 284, 400, 460, 461, 480, 481, 482, 484	3/8	8	99-N262A8			2.940"	.5512"	
	.404	7	99-N262B7			2.940"	.5512"	

PARTNER

MINI P, MINI P2, MINI P3, MINI P4, MINI PA, MINI 22, 330, 350, 1612, 1613, 1614, 1616	3/8 LP	6	99-N217M6			2.290"	.3937"	681-134
	.325	7	99-N217L7			2.290"	.3937"	681-134
350, 365, 405,	3/8 LP	6	99-266M6 99-N266M6			2.500" 2.500"	.3937" .3937"	681-160 681-160
	.325	7	99-N266L7	99-N26624	645-327	2.500"	.3937"	681-160
351	3/8 LP	6	99-N234M6			2.500"	.3937"	681-134
400, P500, P5000, HOMEOWNER 400, 500, 5000, P48, P49	.325	7	99-N110L7	99-N11024	645-327	2.700"	.5000"	681-163
R-16, R-17, R-18, R-19, R-20, R-21, R-22, R-240, R-420, R-421, R-429, F55, F65, P70, 417, 517, S50, S55, S65, 7000	3/8	7	99-N197A7			2.900"	.5512"	
P-18, P-85, P-100, R-30, R-35, R-40, R-435, R-440,	3/8	7	99-N198A7			3.100"	.5512"	
	3/8	8	99-N198A8			3.100"	.5512"	

PIONEER

P10, P12	3/8 LP	6	99-N217M6				.3937"	681-134
P20, P21, P25, P26, P28, 970, 1072, 1073, 1074, HOLIDAY II	.325	8	99-N208L8			2.550"	.5000"	681-163
	3/8	7	99-N208A7			2.550"	.5000"	681-163
WILDCAT, 11-10, 11-20, 11-30, P40, P50, 1200, 2200,	3/8	7	99-N207A7			2.550"		

Chainsaw Make & Model	Pitch	Teeth				Sprocket Drum ID	Crank shaft OD		Sprocket Bearing No.
			Pro Spur Sprocket No.	Centre Drive Sprocket No.	Rim Segment No.				

PIONEER continued

FARMSAW, P38, P41, P42, P45, P51, P52, P55, P60, P61, P62, 700, 750, 1150, 1160, 1200, 1410, 1420, 1450, 1750, 1850, 2270, 2400, 2460, 3071, 3200, 3270	3/8	7	99-N206A7			2.790"	.5000"		
	.404	7	99-N206B7			2.790"	.5000"		
H, J, RA, NU-17, 400, 410, 420, 450, 540, 550, 600, 610, 620, 650	3/8	7	99-N205A8			2.550"	.5000"		
	.404	7	99-N205B7			2.550"	.5000"		

POULAN / POULAN PRO

25, 25A, 25DA, COUNTERVIBE, S-25	3/8 LP	6	99-B225M6			2.700"	.4375"		
20, MICRO 25, 180, 205, 225, 235, 1800, 2000, 2100, 2300, 2400, MICRO S25.	1/4	8	99-B224K8			2.492"	.4062"		
	3/8 LP	6	99-B224M6			2.492"	.4062"		
1800, 2000, 2300 (models with needle bearing) Same as above except w/ needle bearing not bushing	3/8 LP	6	99-N232M6			2.492"	.4062"		
215	3/8 LP	6	99-N217M6			2.290"	10mm	681-134	
230, 260, 2050, 2075, 2150, 2175, 2250, 2450, 2550	3/8 LP	6	99-N234M6			2.500"	10mm	681-134	
285, 305, 335, 336, 365, 415, 2700, 2800, 2900, 3000, 3300, 3450, 3500, 3700, 3750, 4600 TREEMASTER	.325	7	99-231L7	99-23124	645-327	2.700"	.5000"		
255, 295, 2500, 2600, 2750, 2900, 3050, PP210, PP295, P600	3/8 LP	6	99-N266M6			2.500"	10mm	681-160	
	.325	7	99-N266L7	99-N26624	645-327	2.500"	10mm	681-160	
325	.325	7	99-N110L7	99-N11024	645-327	2.700"	.5000"	681-163	
200, 201, 202, 203, 204, 221, 222, 245, 306, 345, 4200, 4400, 4900, 5200, 5400	3/8	7	99-N228A7			3.200"	.5625"		
375, 395, 3400, 3700, 3800, 4000	3/8	7		99-N23011	645-817	3.000"	.5000"		
405, 455, 525, 655	3/8	7	99-N206A7			2.790"	.5000"		

REDMAX - Zenoah

G2500, G320AVS, G380AVS, G310T, G3800	3/8 LP	6	99-451M6			2.670"			
G561AVS, G621AVS, GT556, 561, 620, 621	3/8	7	99-355A7			3.045"	10mm	681-160	

REMINGTON (DESA) *ELECTRIC SAWS*

Remington Electric Saw model: LNT-1 (Replaces Remington# 58295)	3/8 LP	5	99-58295	Bore: 3/8" X 2-5/8" Drum ID X 3-1/2" Drum OD ***WHILE QUANTITIES LAST***					
Remington Electric Saw model: EL-1 (Replaces Remington# 75752)	3/8 LP	5	99-75752	Bore: 3/8" X 2-7/8" Drum ID X 3-1/2" Drum OD ***WHILE QUANTITIES LAST***					

Chainsaw Make & Model	Pitch	Teeth				Sprocket Drum ID	Crank shaft OD	Sprocket Bearing No.
			Pro Spur Sprocket No.	Centre Drive Sprocket No.	Rim Segment No.			

REMINGTON continued

MIGHTY MITE, MIGHTY MITE 100-800, YARDMASTEWR, JOB MASTER, WEEKENDER, OUTDOORSMAN and SPORTSMAN. (*NOTE: 3/8" drum depth*)	3/8 LP	6	99-N238M6			2.240"		
For above models equipped with chain brake. (*Note: 1/2" drum depth*)	3/8 LP	6	99-N114M6			2.240"		
PL-4, PL-5, PL-5A, PL-55, SL-11A, WOODSMAN, LOGGER	3/8	7	99-N147A7	99-N14711	645-817	3.100"	.5000"	681-147
SL-9, SL-9A, SL-10, SL-10A, SL-14, SL-16, RANCHER	1/4	9	99-N237K9			2.720"		
	3/8	7	99-N237A7			2.720"		

RYOBI

GTS	3/8 LP	6	99-451M6			2.670"		
-----	--------	---	----------	--	--	--------	--	--

SACHS DOLMAR see our DOLMAR and MAKITA headings.

SEARS (CRAFTSMAN)

35093, 35094, 35201, 35202, 35203, 35205, 35206, 35207, 35209, 35802	1/4	8	99-N224K8			2.492"	.4062"	
	3/8 LP	6	99-N224M6			2.492"	.4062"	
35095, 35096, 35211, 35215, 35219, 35231, 35232, 35235, 35238, 35255, 35256, EXPLORER I and II, SUPERLIGHT	3/8 LP	6	99-B225M6			2.700"	.4375"	
35881, 35884	3/8	7	99-N228A7			3.200"	.5625"	
35885	3/8	7		99-N23011	645-817	3.000"	.5000"	
35826, 35829	3/8	7	99-355A7			3.045"	.3937"	
SEARS (DAVID BRADLEY) LIGHTWEIGHTS with 1/2" SHAFT	3/8	7	99-N118L8			2.720"		

SHINDAIWA

305, 340, 345, 346, 350, 355, 451	3/8 LP	7	99-242M7			2.650"	10mm	
	.325	7	99-242L7			2.650"	10mm	
300, 300S, 357, 360, 377, 394	3/8 LP	6	99-241M6			2.650"		
400, 488	.325	7		99-24324	645-327	2.810"	10mm	
405, 406, 407, 410, 415, 416, 440, 450, 451, 480, 485, 500	.325	7	99-240L7			2.650"		
	3/8	7	99-240A7			2.650"		
550, 575, 577, 580, 680, 685, 695	3/8	7		99-24411	645-817	3.060"	13mm	

Chainsaw Make & Model	Pitch	Teeth				Sprocket Drum ID	Crank shaft OD	 Sprocket Bearing No.
			Pro Spur Sprocket No.	Centre Drive Sprocket No.	Rim Segment No.			

SKIL (PM-CANADIAN)

310, 944, 1600, 1601, 1602, 1610, 1611, 1612-ELECTRIC, 1613, 1614, 1616, 1700, 1705, 1712	3/8 LP	6	99-N217M6			2.305"	.3937"	681-134
1620, 1622, 1624, 1634	1/4	8	99-B224K8			2.492"	.4062"	
	3/8 LP	6	99-B224M6			2.492"	.4062"	
1635, 1636	3/8 LP	6	99-B225M6			2.700"	.4375"	
177, 187, 350, 360, 360PB, 1660, 1661	3/8	8	99-N214A8			3.000"		
330, 335, 340B, 1630, 1644, 1645	3/8	7	99-N216A7			3.000"		
1632, 1646	3/8	7	99-N197A7			2.900"	.5512"	
1641	3/8	7		99-N23011	645-817	3.000"	.5000"	

SOLO

600, 605, 606 (with 60mm clutch), 631	3/8 LP	6	99-N104M6			2.590"	10mm	681-160
616, 647, 654	.325	8	99-153L8			2.730"	12mm	
	3/8	7	99-153A7			2.730"	12mm	
620, 650, 655, 660	3/8	7	99-120A7			2.770"	14mm	

STIHL

009, 009Q, 010, 010AVEQ, 010AVQ, 011	1/4	8	99-N081K8			2.592"	10mm	
	3/8 LP	6	99-081M6			2.592"	10mm	
015AV, 015E, 015L, 015 PROFESSIONAL	3/8 LP	6	99-181M6			2.592"	10mm	
020AV, 020AVE, 020 PROFESSIONAL 020AV SUPER, (Models with washer), MS200	3/8 LP	6	99-182M6			2.592"	10mm	
017, 018, 021, 023, 025, MS170, MS180, MS210, MS250	3/8 LP	6	99-084M6			2.600"	10mm	681-134
	.325	7		99-08424	645-327	2.600"	10mm	681-134
024, 026 (Before No. X25809074) 7/16" drum depth	.325	7	99-191L7	99-19124	645-327	2.705"	10mm	681-134
026 (adjustable oiler) (After No. X25809074), MS260 9/16" drum depth	.325	7		99-08524	645-327	2.705"	10mm	681-134
028 (After No. 8991531)	.325	7	99-190L7			2.720"	10mm	681-128
029, 034, 036, 039, MS290, MS360, MS390	.325	7	99-193L7	99-N19324	645-327	2.985"	10mm	681-134
	3/8	7	99-193A7	99-N19321	645-827	2.985"	10mm	681-134
030, 031, 032, 040, 041, (After No. 5664891), FARM BOSS, MS310 (spacer required)	3/8	7	99-183A7			2.705"	12mm	
	.404	7	99-183B7			2.705"	12mm	

Chainsaw Make & Model	Pitch	Teeth				Sprocket Drum ID	Crank shaft OD	 Sprocket Bearing No.
			Pro Spur Sprocket No.	Centre Drive Sprocket No.	Rim Segment No.			

STIHL continued

038 (After No. 8421500)	3/8	7	99-192A7			2.825"	12mm	681-127
041, 041AV, 041AVE (Before No. 5664891)	3/8	7	99-045A7			2.700"	12mm	
045AV, 045AVE, 045AVEQ, 056, (Before No. 10963560) (Pin Drive Oil Pump)	3/8	7	99-180A7			3.090"	12mm	
042, 048 (After No. 8407351)	3/8	7	99-194A7			2.960"	15mm	
044, 046, MS440, MS460 > 1 notch in drum	.325	9		99-08617	645-319	3.000"	10mm	681-126
	3/8	7	99-086A7	99-08611	645-817	3.000"	10mm	681-126
050AV, 051AV, 051AVE, 075AV, 075AVE, 076 > spur has a cut out for oil drive	3/8	7	99-184A7			3.370"	14mm	
	.404	7	99-184B7			3.370"	14mm	
07, 07S	.404	7	99-186B7			3.090"	14mm	681-125
08, 08S, S-10	3/8	7	99-187A7			2.610"	15mm	681-125
	.404	7	99-187B7			2.610"	15mm	681-125
064, 066	3/8	7	99-082A7			3.208"	10mm	681-126
084, 088 > 4 notches in drum	.404	7	99-083B7			3.360"	12mm	681-129

TANAKA

350, 351, 356, 370, ECS35, ECS355, ECS405	3/8 LP	6	99-400M6			2.570"		681-134
EC290, 300, 320, 330, 3301	3/8 LP	6	99-N404M6					
ECS415, ECS4000	.325	7	99-402L7			2.570"		681-134
ECS505, ECS650, ECS655	3/8	7	99-N403A7					

TOPSO

E510AV, E610AV	3/8	7	99-183A7			2.705"	12mm	
----------------	-----	---	----------	--	--	--------	------	--

WESTERN AUTO and WRIGHT (POULAN)

WIZARD, 010, 012, 014, 110, 112, 214, 1800, 2000, S25DA, 4010	1/4	8	99-B224K8			2.492"	.4062"	
	3/8 LP	6	99-B224M6			2.492"	.4062"	
Western Auto models: WIZARD AV16, 316 and WRIGHT models: 121, 122A	3/8 LP	6	99-B225M6			2.700"	.4375"	
430	3/8	7	99-N228A7			3.200"	.5625"	
A-18, 3400	3/8	7		99-N23011	645-817	3.000"	.5000"	