


FEATURES OF THE BANTA "OIL FILTER"

- > **Metal Shell**
- > **Relief Valve Assembly** (relief valve opens when necessary to provide engine with oil under all conditions).
- > **Anti-Drain Back Valve** (Anti-drain back valve prevents oil from draining out of the filter during engine shutdown).
- > **Metal End Cap - both top & bottom** (Metal end caps and thermo setting adhesive provide positive seals).
- > **Resin Impregnated Paper Filter Medium** (Cured resin impregnated paper removes harmful foreign particles).
- > **Lid Assembly** (Lid assembly is roll seamed to the shell which provides a leak-tight assembly).

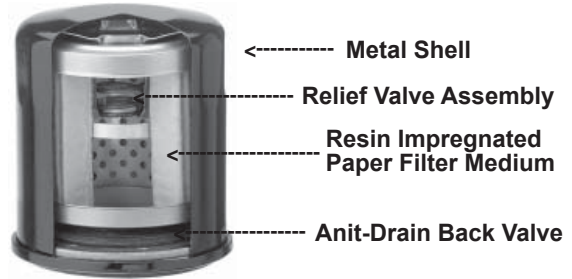

OIL FILTERS - BUY THE SHOP PACK AND SAVE

Part#	O.E.M	Application
120-902	B&S# 499532 / 692513 / 820314 Club Car# 41016467 Cub Cadet# 4902010001 Cushman# 833438 / Gravely# 043594 Gravely# 20777000 / 21480600 / 21527900 John Deere# AM101054 / AM107423 Generac# 70185 Kawasaki# 49065-2057 / 49065-2062 Kawasaki# 49065-2071 / 49065-2078 Kees# 363312 / Onan# 1220737 Snapper# 7-7355 / Tecumseh# 36262 Toro / Wheel Horse# NN10684 Woods# 72859	

SAVE

OIL FILTER SHOP PACK
(12) of our 120-634 oil filters.
> 9 to 12 PSI pressure relief
> anti drain valve
> 3/4"-16 thread
> 2-11/16" OD X 2-15/16" HT
> 28 Micron

Part#	O.E.M	Application
120-901	B&S# 4154 / 492056 / 492932 / 492932S B&S# 696854 / 695396 / 842921 Kawasaki# 49065-7002 / 49065-7007 Kohler# 25 050 01 Tecumseh# 36563 / 36961	

SAVE

OIL FILTER SHOP PACK
(12) of our 120-485 oil filters.
> 7 to 9 PSI pressure relief
> anti drain valve
> 3/4"-16 thread
> 3" OD X 2-5/16" HT
> Seal OD: 2-13/16"
> 28 Micron

120-904	Cub Cadet# CC1205008 Gravely# 21397200 John Deere# AM125424 / KH1205008 Kohler# 12 050 01 / Woods# 70820	
----------------	---	--

SAVE


OIL FILTER SHOP PACK
(12) of our 120-523 oil filters.
> 8 to 11 PSI pressure relief
> anti drain valve
> 3/4"-16 thread
> 3" OD X 2-3/4" HT
> 27 Micron

120-903	B&S# 4153 / 491056 Case# (ingersoll) C26191 Gravely# 042366, John Deere# AM101207 Kohler# 52 050 02, Onan# 122 0645 Woods# 70939 Toro / Wheel Horse# NN10147	
----------------	---	--


SAVE

OIL FILTER SHOP PACK
(12) of our 120-345 oil filters.
> 8 to 11 PSI pressure relief
> anti drain valve
> 3/4"-16 thread
> 3" OD X 3-1/4" HT
> 27 Micron

ARIENS


Part#	O.E.M	Application
120-519	31928 / 03192800 Bolens# 1719859 Bolens# 1726450	
Transmission Filter For most Tractors with hydrostatic transmissions; - 8 to 11 PSI pressure relief. - Size: 3/4"-16 thread X 3-13/16" OD X 3-23/32" HT; - Mounting seal OD: 2-13/16"; Anti drain valve, 28 Micron.		

BOBCAT

120-501	48045B	
Transmission Filter For XM Hydro series & 700 series. -8 to 11 PSI pressure relief. - 3/4"-16 thread X 3-13/16" OD X 2-3/4" HT; - Anti drain valve; 16 Micron. (While Quantities Last)		

For BOLENS - see ARIENS and TROY BILT


BRIGGS & STRATTON


120-485	4154 / 5049 / 5076 492932 / 492932S 492056 / 695396 696854 / 842921	
Oil Filter For 5 Hp Vanguard engines. Fits models 104700, 261700, 290700, 294700, 303700 and 350700; - 7 to 9 PSI pressure relief - 3/4"-16 thread X 3" OD X 2-5/16" HT, 2-13/16" Seal OD, - Anti drain valve, 28 micron; (Vanguard models small version filter) NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-901		


120-345	4153 491056 / 491056S	
Oil Filter For most Vanguard series and twin cylinder engines. Fits models: 260700, 261700 & 290700. - 8 to 11 PSI pressure relief, - 3/4"-16 thread X 3" OD X 3-1/4" HT, - Anti drain valve, 27 micron (Vanguard models large version filter) NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-903		


120-634	300314 / 499532 692513 / 820314 Generac# 70185	
Oil Filter Found on Briggs Generac models. For 6.5 Hp Intek Pro model engines. Models 122600 and 123600. - 9 to 12 PSI pressure relief - 3/4"-16 thread X 2-11/16" OD X 2-15/16" HT, - Anti drain valve, 28 micron. Mounting seal: 2-1/2" OD; , NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-902		


BRIGGS & STRATTON


Part#	O.E.M	Application
120-500	795990	
Oil Filter Fits models: 121Q72, 121S72, 121S75, 121S77, 12Q972, 12S972 and 12S975. - 3/4"-16 thread X 1.90" OD X 2-1/4" HT, - Mounting seal OD: 1-13/16" Seal OD, 3/4"-16 thread.		


125-211	66768 / 281685 John Deere# M47797 Tecumseh# 27625	
Oil Fill Plug For most Briggs and Stratton, Clinton and Tecumseh engines with angled oil fill neck. Made of nylon.		


125-225	691913 280485 281081	
Oil Plug with built in Dipstick. Fits 4 Hp vertical shaft engines. Models: 114900 - 114995.		

125-218	280663	
Oil Plug with dipstick For B&S Quantum engines.		


125-413	68838 281370 805259	
Oil Grommet For 7 & 11 Hp horizontal, 12 & 13 Hp vertical & Vanguard V-Twin horizontal engines with extended plastic dip sticks.		

125-294	92738 / 690289	
Magnetic Oil Plug Size: 3/8"-18 pipe thread. (Sold in Multiples of 5)		




125-302	94174 94687 / 691663	
Magnetic Oil Plug Size: 1/4"-18 pipe thread. (Sold in Multiples of 5)		

125-203	296768 / 692939	
Oil Minder Gauge For Briggs, Clinton and Tecumseh engines. Permanently replaces oil filler plug with the "oil minder". Press rubber bulb and release. If oil can be seen, oil level is OK.		

CASE

120-345	C26191	
Oil Filter - 3/4" - 16 thread X 3" OD X 3-1/4" HT. - 8 to 11 PSI pressure relief - Anti drain valve, 27 micron (Vanguard models large version filter) NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-903		



CUB CADET

Part#	O.E.M	Application
120-519	723-3014 923-3014 759-3605 Cushman# 111836 IH-395789-R-2	
Transmission Filter Fits models: 1250, 1450 and 1862. - 8 to 11 PSI pressure relief. - 3/4"-16 thread X 3-13/16" OD X 3-23/32" HT; - Anti drain valve, 25/30 micron. Mounting seal OD: 2-13/16";		
120-523	CC1205008	
Oil Filter For Cub Cadet 1500 and 2000 series lawn tractors with Kohler engines. - 8 to 11 PSI pressure relief; - 3/4"-16 thread X 3" OD X 2-3/4" HT; - Anti drain valve, 27 micron. NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-904		
120-360		
Oil Filter Fits models: 107, 117, 220 and 444. - 11 to 14 PSI pressure relief - M20 X 1.5 thread X 3-1/4" OD X 3-1/8" HT - Anti drain valve, 27 Micron		



DIXON & ENCORE

120-361	Dixon# 5565 Dixon# 7252 Encore# 423063	
Transmission Filter Fits models 501, 502, 5501, 5421 and 5601. - 18 PSI pressure relief; - 3/4"-16 thread X 3" OD X 3-7/8" HT, - Mounting seal OD: 2-3/4", 10 Micron		


EXMARK & FERRIS

120-362	Exmark# 109-3321 Hustler# 768341 / 600976 Encore# HG52114	
Oil Filter Fits Transmission Model ZT2800. Found on Exmark, Hustler & Scag models. - 3/4"-16 thread X 2-11/16" OD X 3" HT, - Mounting seal OD: 2-1/2".		
120-361	Exmark# 513211 Exmark# 1-513211 Ferris# 22028	
Transmission Filter Fits models 501, 502, 5501, 5421 and 5601. - 18 PSI pressure relief; - 3/4"-16 thread X 3" OD X 3-7/8" HT, - Mounting seal OD: 2-3/4", 10 Micron		




EXMARK & FERRIS cont.

Part#	O.E.M	Application
120-710	Exmark# 103-2146 Ferris# 1521357	
Transmission Filter Fits Exmark models: Front Runner and Lazer Z. Most Ferris Zero Turn mowers. - 1"-12 thread X 3-3/4" OD X 5-1/4" HT, - Anti drain valve, 25 micron.		
120-220	Exmark# 513211 Exmark# 1-513211 Exmark# 633750 Exmark# 1-633750 Exmark# 109-4180 Ferris# 22028	
Transmission Filter Large version of our 120-361. (While Quantities Last) - 8 to 11 PSI pressure relief, - 3/4" - 16 thread X 3-13/16" OD X 3-7/8" HT; - Anti drain valve, 10 micron		



GENERAC

120-634	70185 070185 070185D	
Oil Filter Found on many Generac models. - 9 to 12 PSI pressure relief, - 3/4"-16 thread, 2-11/16" OD X 2-15/16" HT, - Anti drain valve, 27 micron; Mounting seal: 2-1/2" OD. NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-902		

GRAVELY

120-600	12722 12722-P1	
Oil Filter For 7.6 "L" series tractors. - 8 to 11 PSI pressure relief - 3/4"-16 thread X 3-3/4" OD X 4-1/4" HT. - Anti drain valve, 20 - 25 Micron (While Quantities Last)		
120-634	043594 / 20777000 / 21480600 21527900 / 21535800 Cub Cadet# 490-201-001	
Oil Filter For models with Kawasaki engines. - 9 to 12 PSI pressure relief - Mounting seal OD: 2-1/2" - Anti drain valve, 28 Micron. - 3/4"-16 thread X 2-11/16" OD X 2-15/16" HT; NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-902		
120-345	042366	
Oil Filter - 8 to 11 PSI pressure relief, - 3/4"-16 thread, 3" OD X 3-1/4" HT, - Anti drain valve, 27 Micron. - Mounting seal OD: 2-1/2" NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-903		







GRAVELY continued

Part#	O.E.M	Application
120-523	21397200	
<p>Oil Filter For models with Kohler engines. - 8 to 11 PSI pressure relief - 3/4"-16 thread X 3" OD X 2-3/4" HT - Anti drain valve, 27 micron NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-904</p>		
120-519	39306	
<p>Transmission Filter For Pro Master 400 series. - 8 to 11 PSI pressure relief, - Mounting seal OD: 2-13/16" - Anti drain valve, 28 Micron. - 3/4" - 16 thread X 3-13/16" OD X 3-3/4" HT.</p>		




HONDA & HUSQVARNA

120-360	Honda# 15400-679-023 / 15400-679 033 15400-POH-305 / 15400-PR3-004 15410-MB0-000 / 15410-MJO-004 15410-MJO-003 / 15410-MJO-405 54410-MJO-003 / 54410-MJO-004 54410-MJO-405 Code# 3481355 Code# 5038781 Code# 6424329 Code# 0801597 Code# 1384445 Code# 1395417	
<p>Oil Filter For Honda models: EM5000, GX360K1 water cooled engines. - 11 to 14 PSI pressure relief, - M20 X 1.5 thread. 3-1/4" OD X 3-1/8" HT, - Anti drain valve, 27 micron</p>		
120-383	Honda# 15410-MCJ-000 15410-MCJ-003	
<p>Oil Filter Fits model GXV530, 16 Hp V-Twin. - M20 X 1.5mm - 2.685" OD X 2.782" HT</p>		
120-361	Honda# 25641-ZE4-003 25641-VE4-003 Code# 4035697 Husqvarna# 539 10 26-06 531 30 73-94 Kees# 101164 Yazoo#101164	
<p>Transmission Filter Fits models HRC7013, HRC7018 and HRC7020. - 18 PSI pressure relief; - 3/4" - 16 thread X 3" OD X 3-7/8" HT - Mounting seal OD: 2-3/4" - 10 micron</p>		




HONDA & HUSQVARNA

Part#	O.E.M	Application
120-384	Honda# 15400-POH-305 15400-PLM-A01PE 15400-POH-305 15400-ZJ1-004 Code# 7698475 Club Car# 15400POH305	
<p>Oil Filter Fits Honda 18, 20 and 24 Hp V-Twin engines. Fits Models: GX610, GX620, GX630, GX660, GX670, GX690, GXV340, GXV390, GXV610, GXV620, GXV630, GXV660, GXV670 and GXV690 Engines: HA4118, HA4120, HRC7013, HRC7031K1, HRC7018, HRC7020, HRC7113 and H6522 Compact Tractors; EB1100 and EB12D Generators. - 27 Micron - 20mm X 1.5mm X 2-5/8" OD X 3-3/8" HT, Note: This filter replaces old Honda# 15400-PLM-A02</p>		
120-485	Husqvarna# 531 30 70-43 531 30 73-89	
<p>Oil Filter - 7 to 9 PSI pressure relief, - 3/4"-16 thread, - 3" OD X 2-5/16" HT, 2-13/16" Seal OD - Anti drain valve, 28 micron (Vanguard models small version filter). NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-901</p>		
120-634	Husqvarna# 531 30 73-88	
<p>Oil Filter - 9 to 12 PSI pressure relief - 3/4"-16 thread - 2-11/16" OD X 2-15/16" HT - Mounting seal: 2-1/2" OD. - Anti drain valve, 27 micron NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-902</p>		
120-345	Husqvarna# 531 30 73-92	
<p>Oil Filter - 8 to 11 PSI pressure relief - 3/4"-16 thread - 3" OD X 3-1/4" HT - Anti drain valve, 27 micron. (Vanguard models large version filter). NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-903</p>		
120-523	Husqvarna# 531 30 73-93	
<p>Oil Filter - 8 to 11 PSI pressure relief - 3/4"-16 thread - 3" OD X 2-3/4" HT - Anti drain valve, 27 micron. NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-904</p>		
125-264	Honda# 15600-ZG4-003 Code# 4497921	
<p>Oil Filter Cap Fits models GX110, GX120, GX140, GX160, GX200, GX240, GX270, GX340, GX390.</p>		






HONDA & HUSQVARNA

Part#	O.E.M	Application
125-240	Honda#'s 15600-ZG4-003 15600-ZE1-003 Code# 4500146	
Oil Dipstick and Gasket Fits models GX110, GX120, GX140, GX160		
125-241	Honda# 15650-ZM0-801	
Oil Dipstick and Gasket Fits models: GCV135 and GCV160		
125-239	Honda# 15558-ZJ1-010AH	
Oil Drain Valve Fits Honda Metric M14 X 1.5 thread.		


JOHN DEERE

120-638	M806418	
Oil Filter Fits John Deere models: 1420, 1435, 1445, F735, F912, F915, F925, F935, 425, 445, 455 diesel, 1420, 1435, 1565, F735, F912, F915, F925, F932, F935, GX355, X495, X595, X740, X744, X748, X749, HPX Diesel Gator, 2500 and 2500A Greensmowers. - 11 to 14 PSI pressure relief; - M20 X 1.5 thread X 2-5/8" OD X 2-1/2" HT; 0 - Anti drain valve, 20 Micron		
120-345	AM101207	
Oil Filter Fits John Deere lawn tractors STX46 (290001) with Kohler engines. - 8 to 11 PSI pressure relief - 3/4" - 16 thread X 3" OD X 3-1/4" HT. - Anti drain valve, 27 micron. NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-903		
120-523	AM125424 KH1205008	
Oil Filter For John Deere lawn tractors SST15, L100 and LX173 with Kohler engines. Fits Kohler engine models: CH18 thru Ch25, CV18 thru CV25 & K582. - 8 to 11 PSI pressure relief. - 3/4" - 16 thread X 3" OD X 2-3/4" HT - Anti drain valve, 27 micron NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-904		




HONDA & HUSQVARNA

Part#	O.E.M	Application
120-634	AM101054 AM101207 AM107423	
Oil Filter For models with Kawasaki engines. Fits John Deere lawn tractors 112L, LX172 and LX176 with Kawasaki engines; front mount F510. - 9 to 12 PSI pressure relief; - Mounting seal OD: 2-1/2" - 3/4" - 16 X 2-11/16" OD X 2-15/16" HT - Anti drain valve, 28 micron. NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-902		
120-626	AM39687 AM34770	
Oil Filter For models with Kohler engines. - 8 to 11 PSI pressure relief, - 3/4" - 16 thread X 3" ODX 5-1/8" HT; - Mounting seal OD: 2-7/8" - Anti drain valve; 28 micron		
120-360	M806418 AM101378	
Oil Filter Fits models 300, 400, F912, 915, 925, 932 and 935 series. - 11 to 14 PSI pressure relief, -M20 X 1.5 thread 3-1/4" OD X 3-1/8" HT - Anti drain valve, 27 micron.		
120-519	AM39653 AM35176 AM31205 AM38441	
Transmission Filter Front mount mowers F911, F912, F915, F925, F932 and F935; Z-trak mowers F620, F680, F687, F737 and F757; Lawn tractors: 140, 230, 300, 312, 314, 316, 317, 318, 322, 330, 332, 400, 420, 430 and 900 series. - 8 to 11 PSI pressure relief, - Anti drain valve 3/4", 25/30 Micron - 16 thread X 3-13/16" OD X 3-3/4" HT. - Mounting seal OD: 2-13/16,		
120-512	AM131053	
Transmission Filter Fits Groundsmaster 300 series. For new Pro Line commercial mowers. - 1" - 12 thread 3-3/4" OD X 3-5/8" HT - Rubber Seal OD: 2-7/8", 10 micron		


JOHN DEERE

Part#	O.E.M	Application
120-485	GY20577 / AM119567 LG492932S	
<p>Oil Filter Fits John Deere models: F620, F680, F687, M653, M655, M665, Z245, Z425, Z510A, Z520A, Z910A and Z920A ZTrak mowers and lawn tractors, 1200 Hydro Rake, 80Aercore Aerator. - 7 to 9 PSI pressure relief; - 3/4"-16 thread, 3" OD X 2-5/16" HT, - Mounting seal OD: 2-13/16"; Anti drain valve, 28 micron. (Vanguard models small version filter). NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-901</p>		
120-166	AM131054	
<p>Hydraulic Oil Filter Fits John Deere models: 425, 445, 455, X465, X475, X485, X495, X700, X740, X749, 647, 647A, 657, 657A, 667, 667A, 717, 717Z-Trax, 727, 727A, 777, 797 Z-Trak, Z425, Z445, Z465 EZ-Trak and 4100 compact diesel. - 1' - 12 Thread, 3-3/4" OD X 3-5/8" HT, - 20 Micron</p>		
125-235	AM115362	
<p>Oil Drain Valve Fits John Deere models equipped with Kawasaki engines. Metric M16 X 1.5 thread.</p>		





KAWASAKI

125-235	99969-1395	
<p>Oil Drain Valve Fits Kawasaki engines. Metric M16 X 1.5 thread.</p>		
120-485	49065-7002 49065-7007	
<p>Oil Filter Fits models: FB460V, FC420V, FC540V, FD501D, FD590V, FR651V, FR691V, FR730V, FX481V, FX541V, FX600V, FX651V, FX691V and FX730V. - 7 to 9 PSI pressure relief - 3/4"-16 thread, 3" OD X 2-5/16" HT - Mounting seal OD: 2-13/16" Seal OD - Anti drain valve, 28 micron NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-901</p>		
120-634	49065-2078 / 49065-2074 49065-2071 / 49065-2070 49065-2062 49065-2057 Kees# 363312	
<p>Oil Filter Fits Kawasaki 14 thru 19 Hp engines. - 3/4" - 16 thread - 2-11/16" OD X 2-15/16" HT; Mounting seal OD: 2-1/2" - 9 to 12 PSI pressure relief; Anti drain valve, 28 micron. NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-902</p>		




KAWASAKI continued

Part#	O.E.M	Application
120-638	16097-1072	
<p>Oil Filter Fits John Deere models: 1420, 1435, 1445, F735, F912, F915, F925, F935, 425, 445, 455 diesel, 1420, 1435, 1565, F735, F912, F915, F925, F932, F935, GX355, X495, X595, X740, X744, X748, X749, HPX Diesel Gator, 2500 and 2500A Greensmowers. - 11 to 14 PSI pressure relief; - M20 X 1.5 thread X 2-5/8" OD X 2-1/2" HT; - Anti drain valve, 20 Micron</p>		





KOHLER

120-485	25 050 01 28 050 01-S	
<p>Oil Filter Fits models: CH18-CH25 & CV18-CV25; for 18 thru 25 HP engines. - 7 to 9 PSI pressure relief, 3/4"-16 thread, - 3" OD X 2-5/16" HT, 2-13/16" Seal OD, - Anti drain valve, 28 micron (Vanguard models small version filter). NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-901</p>		
120-345	25 050 33-S 25 050 34-S 52 050 02 52 050 02-S	
<p>Oil Filter Fits engine models: Fits Kohler engine models: CH11 thru CH25, CV11 thru CV22, M18 thru M20, MV16 thru MV20, K582, CV640, SV730, SV810, SV820, SV830 and SV840. - 8 to 11 PSI pressure relief - 3/4"-16 thread, 3" OD X 3-1/4" HT - Anti drain valve, 27 micron. (Vanguard models large version filter). NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-903</p>		
120-523	12 050 01 12 050 01-S 12 050 08 Woods# 70820	
<p>Oil Filter Fits models CH18 thru 25, CV18 thru 25 and K582. - 8 to 11 PSI pressure relief, - 3/4" - 16 thread X 3" OD X 2-3/4" HT - Mounting seal OD: 2-13/16" - Anti drain valve, 27 micron. NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-904</p>		
120-626	277233 277233-S	
<p>Oil Filter Fits models K482, K532 & K582. - 8 to 11 PSI pressure relief, - 3/4" - 16 thread 3" OD X 5-1/8" HT - Mounting seal OD: 2-7/8" - Anti drain valve, 28 micron</p>		


KOHLER continued

Part#	O.E.M	Application
125-237	25 462 08 25 755 14 25 755 14S Tecumseh# 37651	
Oil Drain Valve Adapts to most 8 Hp and larger engines. Permanent mount on engines. - 1/2" drain hose connection, - 3/8" - 18 NPTF thread		
125-294	X-305-4 X-305-4-S	
Magnetic Oil Plug Size: 3/8"-18 pipe thread. (Sold in Multiples of 5)		
125-302	X-75-10 X-75-10-S 25 139 57-S	
Magnetic Oil Plug Size: 1/4"-18 pipe thread. (Sold in Multiples of 5)		

KUBOTA

120-359	15241-32090 Grasshopper# 100800	
Oil Filter Fits many B, BX, G, F, U and ZD series Kubota's. Fits diesel engines. 20mm X 1.5mm X 3.243" OD X 2.944" HT.		
120-360	70000-15241 70000-74034 30401-37580 Troy Bilt# 1874139	
Oil Filter Fits models T1600H, D600, D650, D750, D850 and D950. - 11 to 14 PSI pressure relief - M20 X 1.5 thread X 3-1/4" OD X 3-1/8" HT - Rubber seal OD: 2-1/2", anti drain valve, 27 micron		
120-383	15853-32430 15853-99179 Toro# 93-4295 Honda# 15410-MCJ-000	
Oil Filter Smaller version of our 120-360. - M20 X 1.5 thread X 2-5/8" OD X 2-3/4" HT, - Rubber seal OD: 2-1/2", anti drain valve.		
120-597	66021-36060 Perkins# 1405161-90 Toro# 85-4930	
Transmission Filter Fits all "B" series Kubota as well as Perkins and Toro. (Replaces Perkins# 1405161-90) (While Quantities Last) - 3/4"-16 Thread, 3" OD X 4-1/16" HT; - Mounting seal OD: 2-3/4"; 25 Micron		

MTD

Part#	O.E.M	Application
120-519	727-0162	
Transmission Filter For hydrostatic transmissions. - 8 to 11 PSI pressure relief, - 3/4" - 16 thread 3-13/16" OD X 3-3/4" HT. - Mounting seal OD: 2-13/16". - Anti drain valve, 28 micron		

ONAN

120-634	122-0737 122-0737-03	
Oil Filter Fits model E125V with Kawasaki engine. - 9 to 12 PSI pressure relief, - 3/4"-16 thread, 2-11/16" OD X 2-15/16" HT, - Anti drain valve, 27 micron; - Mounting seal: 2-1/2" OD. NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-902		
120-345	122-0645	
Oil Filter Fits models P216, 218, 220, BFA, BGA, BGAL, BGD, BGDL, BGE, BGEL, BGM, B43G & B48GM. - 3/4" - 16 thread X 3" OD X 3-1/4" HT. - 8 to 11 PSI pressure relief; - Anti drain valve, 27 micron NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-903		
120-517	122-0800 122-0323 122-0445	
Oil Filter Fits 16 and 20 Hp twin cylinder models from 1989 thru 1994. - 8 to 11 PSI pressure relief, - 3/4" - 16 X 3" OD X 4-5/8" HT; - Anti drain valve, 25 - 30 micron		
120-626	122-0469	
Oil Filter Fits models NA, NHB, NHC, NHP, N52M, P224 & T260. - 8 to 11 PSI pressure relief, - 3/4" - 16 thread X 3" OD X 5-1/8" HT; - Anti drain valve, Mounting seal OD: 2-7/8", 28 micron.		
120-519	122-0185	
Transmission Filter Fits models JA, JB, JC and JF. - 3/4"-16 thread X 3-13/16" OD X 3-23/32" HT; - Mounting seal OD: 2-13/16"; - Anti drain valve, 25/30 Micron.		


SCAG

Part#	O.E.M	Application
120-512	48462-01	
Transmission Filter Fits Hydro units. - 1" - 12 thread - 3-3/4" OD X 3-5/8" HT - Rubber Seal OD: 2-7/8", 10 micron		
120-362	HG52114	
Oil Filter Replaces Scag Hydro Gear Hg52114. Fits (Transmission Model Zt2800). Replaces Scag HG52114, fits Freedom Z. Also found on Exmark, Hustler and Scag models. Size: 2-11/16" OD X 3" HT, Mounting seal OD: 2-1/2"		
125-235	482351	
Oil Drain Valve Fits many Scag models equipped with Kawasaki engines. Metric M16 X 1.5 thread.		
125-238	482352	
Oil Drain Valve Fits Scag and also some Kawasaki 19 thru 25 Hp vertical engines. 3/8" - 18 NPTF threads		
125-236	482349	
Oil Drain Valve Fits Scag and also some Kawasaki 19 thru 25 Hp vertical engines. Metric M20 X 2.5mm threads		


SIMPLICITY

120-519	171439 1650954	
Transmission Filter Fits Sunstrand hydro models. - 8 to 11 PSI pressure relief, - 3/4" - 16 thread - 3-13/16" OD X 3-3/4" HT - Mounting seal OD: 2-13/16". - Anti drain valve, 28 Micron		

SNAPPER

120-634	7-7355	
Oil Filter For Snapper models equipped with Kawasaki engines. - 9 to 12 PSI pressure relief - 3/4" - 16 thread 2-3/4" OD X 2-15/16" HT - Mounting seal OD: 2-11/16". - Anti drain valve, 28 micron NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-902		

SNAPPER continued

Part#	O.E.M	Application
120-512	2-7164 / 7027164	
Transmission Filter Fits Hydro units. - 1" - 12 thread - 3-3/4" OD X 3-5/8" HT - Rubber Seal OD: 2-7/8", 10 micron		







TECUMSEH

120-485	36563 36961	
Oil Filter Fits models OHV130, OHV135, OHV150, OHV155, OHV165, OHV175, OHV180, TTV691, OV and VTX. - 3/4" - 16 thread X 3" OD X 2-5/16" HT, Rubber seal - OD: 2-13/16", 7 to 9 PSI pressure relief, - Anti drain valve, 28 micron. NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-901		
120-634	36262	
Oil Filter For models OHV15 specs 204003, 204005, 204010, 204013 and OHV16 specs 204205A. - 9 to 12 PSI pressure relief, - 3/4" - 16 thread - 2-11/16" OD X 2-15/16" HT, - Mounting seal OD: 2-1/2". Anti drain valve, 28 micron. NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-902		



TORO / WHEEL HORSE

120-634	NN10684 / 108-3842 KW10586 / KW10761 Woods# 72859	
Oil Filter Fits Toro models with Kawasaki engines. - 9 to 12 PSI pressure relief; - 3/4" - 16 thread - 2-11/16" OD X 2-15/16" HT, - Mounting seal OD: 2-1/2", Anti drain valve, 28 micron NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-902		
120-523	98020	
Oil Filter For models with Kohler engines. - 8 to 11 PSI pressure relief; - 3/4" - 16 thread, 3" OD X 2-3/4" HT - Mounting seal OD: 2-13/16". Anti drain valve, 27 micron NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-904		
120-345	NN10147 Woods# 70939	
Oil Filter Fits models with Kohler engines. - 8 to 11 PSI pressure relief, - 3/4" - 16 thread - 3" OD X 3-1/4" HT - Mounting seal OD: 2-13/16". Anti drain valve, 27 micron NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-903		

TORO / WHEEL HORSE

Part#	O.E.M	Application
120-517	NN10143	
Oil Filter Fits 16 and 20 Hp twin cylinder models from 1989 thru 1994. - 8 to 11 PSI pressure relief, - 3/4" - 16 thread - 3" OD X 4-5/8" HT - Anti drain valve, 25 - 30 micron		
120-710	28-1370 54-0110	
Transmission Filter Fits Toro / Wheel Horse Groundsmaster 117 and 118 models, Greenmaster 3, Turfpro and SandPro models. - Thread Size: 1"-12, - 3-3/4" OD X 5-1/4" HT, 25 / 28 Micron, Anti-Drain.		
120-519	108335 79-5270	
Transmission Filter For hydrostatic transmissions. Fits hydro models 300, 400 and 500 series. - 8 to 11 PSI pressure relief, - 3/4" - 16 thread. 3-13/16" OD X 3-3/4" HT - Mounting seal OD: 2-13/16". Anti drain valve, 28 micron		
120-220	23-2300	
Transmission Filter Large version of our 120-361. Will fit both applications listed - see actual size below. Fits Toro Groundsmaster models 217, 220, 322 and 327 series. (While Quantities Last) - 8 to 11 PSI pressure relief, - 3/4" - 16 thread 3-13/16" OD X 3-7/8" HT; - Mounting seal OD: 2-13/16". Anti drain valve, 10 micron		
120-361	23-9740 63-3750 E63-3750	
Transmission Filter Small version of our 120-220. For hydrostatic transmissions. - 8 to 11 PSI pressure relief, - 3/4" - 16 thread 3" OD X 3-7/8" HT; - Mounting seal OD: 2-13/16". Anti drain valve, 10 micron		
120-512	67-8110	
Transmission Filter Fits Groundsmaster 300 series. For new Pro Line commercial mowers. 1" - 12 thread 3-3/4" OD X 3-5/8" HT Mounting seal OD: 2-7/8", 10 micron		

TORO / WHEEL HORSE

Part#	O.E.M	Application
120-485		
Oil Filter For 5 Hp Briggs and Stratton Vanguard engines. Fits models: 104700, 261700, 290700, 294700, 303700 and 350700. - 7 to 9 PSI pressure relief, - 3/4"-16 thread, 3" OD X 2-5/16" HT, 2-13/16" Seal OD - Anti drain valve, 28 micron (Vanguard models small version filter). NOTE: SAVE "SHOP PACK of 12" available - Banta Saw order# 120-901		
120-464	63-3752 E63-3752 Dixie Chopper# 68140 Exmark# 523541	
Transmission Filter For hydrostatic transmissions. - 3/4" - 16 thread - 3" OD X 3-7/8" HT - 40 micron		

TROY BILT & YANMAR

120-519	1719859 1726450	
Transmission Filter Fits models 1455, 1476, 1477, 166, 1660, 1666, 1886, 194, 197, 198, 2086, 2087, QT-16, 13060, 13062, 13074 & 13076 hydro garden tractors and 13101 GTX hydro garden tractors. - 3/4" - 16 thread X 3-13/16" OD X 3-3/4" HT. - 8 to 11 PSI pressure relief, - Anti drain valve Mounting seal OD: 2-13/16", 28 micron		
120-360	1874139 Yanmar# 129150-35150	
Oil Filter Fits model 1704 with 17 Hp Diesel engine. - 11 to 14 PSI pressure relief, - M20 X 1.5 thread - 3-1/4" OD X 3-1/8" HT - Mounting seal: 2-1/2" OD, Anti drain valve, 27 micron		
120-220	1719859 1726450	
Transmission Filter Large version of our 120-361. Will fit both applications listed - see actual size below. Fits Troy Bilt models (While Quantities Last) 1455, 1476, 1477, 166, 1660, 1666, 1886, 194, 197, 198, 2086, 2087, QT-16; 13060, 13060, 13062, 13074 and 13076 hydro garden tractors; 13101 GTX hydro garden tractors. - 3/4" - 16 thread - 3-3/16" OD X 3-23/32" HT - 8 to 11 PSI pressure relief, Anti drain valve, 10 micron		